

**Applicable contactors:**

DC, busbars type contactors (CC series)
This terminal can also be used as insulated
bus-bar support.

GENERAL CHARACTERISTICS CARACTERISTIQUES GENERALES

Temperature range / Gamme de température	-55°C to +125°C
Altitude / Altitude	-15 000ft to +50,000ft
Dielectric strength at sea level (main contact) / Rigidité diélectrique au niveau de la mer (contact principal)	1800 Vrms
Vibrations & shocks / Vibrations & chocs	Refer to levels of applicable contactors
Crash safety / Sécurité des chocs	20 G / 11ms
Operating current / Courant de fonctionnement	400 A
Power insert material / Matériau d'insertion de puissance	Aluminium Alloy, Silver plated Alliage d'aluminium, Plaqué argent

LEACH INTERNATIONAL EUROPE S.A.S.

Tel: +33 3 87 97 98 97

Fax: +33 3 87 97 96 86

LEACH INTERNATIONAL ASIA PACIFIC


Tel: +852 2 191 3830

Fax: +852 2 389 5803

The technical information provided by Leach International Europe is to be used as a guide only, and is not meant for publication or as documentation for altering any existing specification. Dimensions are in millimeters unless otherwise specified. Rev. 03/2025.

MOUNTING STYLES TYPES DE CONFIGURATION

TF400MNF1F1 (Weight / Masse 39.4 g max)

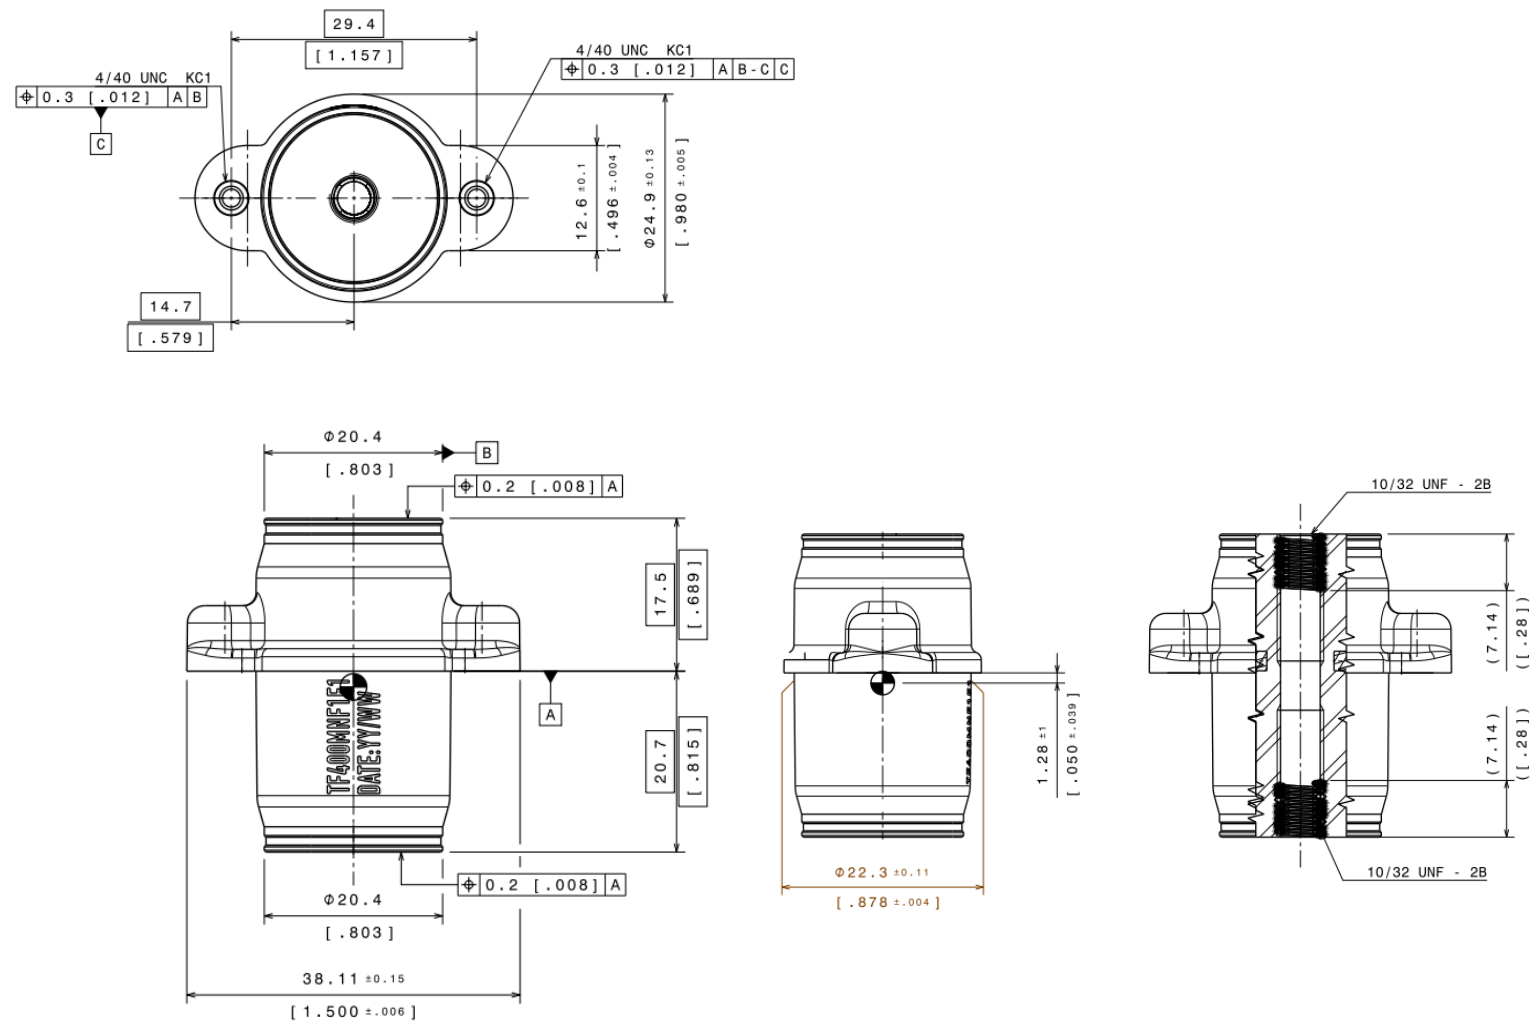

TYPE TF400MNM1F1 (Weight / Masse 46.8 max)

